

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
28 April 2005 (28.04.2005)

PCT

(10) International Publication Number
WO 2005/037522 A1

(51) International Patent Classification⁷: B29C 45/72,
49/64

CORAN, Massimo [IT/IT]; Via Colombo 32, I-31027
Spresiano (IT). PAVANETTO, Jader [IT/IT]; Via Martiri
Di Marzabotto, 94, I-30174 Mestre (IT).

(21) International Application Number:
PCT/EP2004/052456

(74) Agent: GERVASI, Gemma; Nobarbartolo & Gervasi
S.p.A., Corso di Porta Vittoria 9, I-20122 Milan (IT).

(22) International Filing Date: 6 October 2004 (06.10.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
RM2003A000461 7 October 2003 (07.10.2003) IT

(81) Designated States (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.

(71) Applicant (*for all designated States except US*): S.I.P.A.
SOCIETÀ INDUSTRIALIZZAZIONE PROGET-
TAZIONE AUTOMAZIONE S.p.A. [IT/IT]; Via Caduti
del Lavoro 3, I-31029 Vittorio Veneto (IT).


(84) Designated States (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI,

(72) Inventors; and

(75) Inventors/Applicants (*for US only*): ZOPPAS, Matteo
[IT/IT]; Via S. Pellico, 46, I-33074 Fontana fredda (IT).

[Continued on next page]

(54) Title: CONDITIONING DEVICE FOR PLASTIC ITEMS AND PROCESS

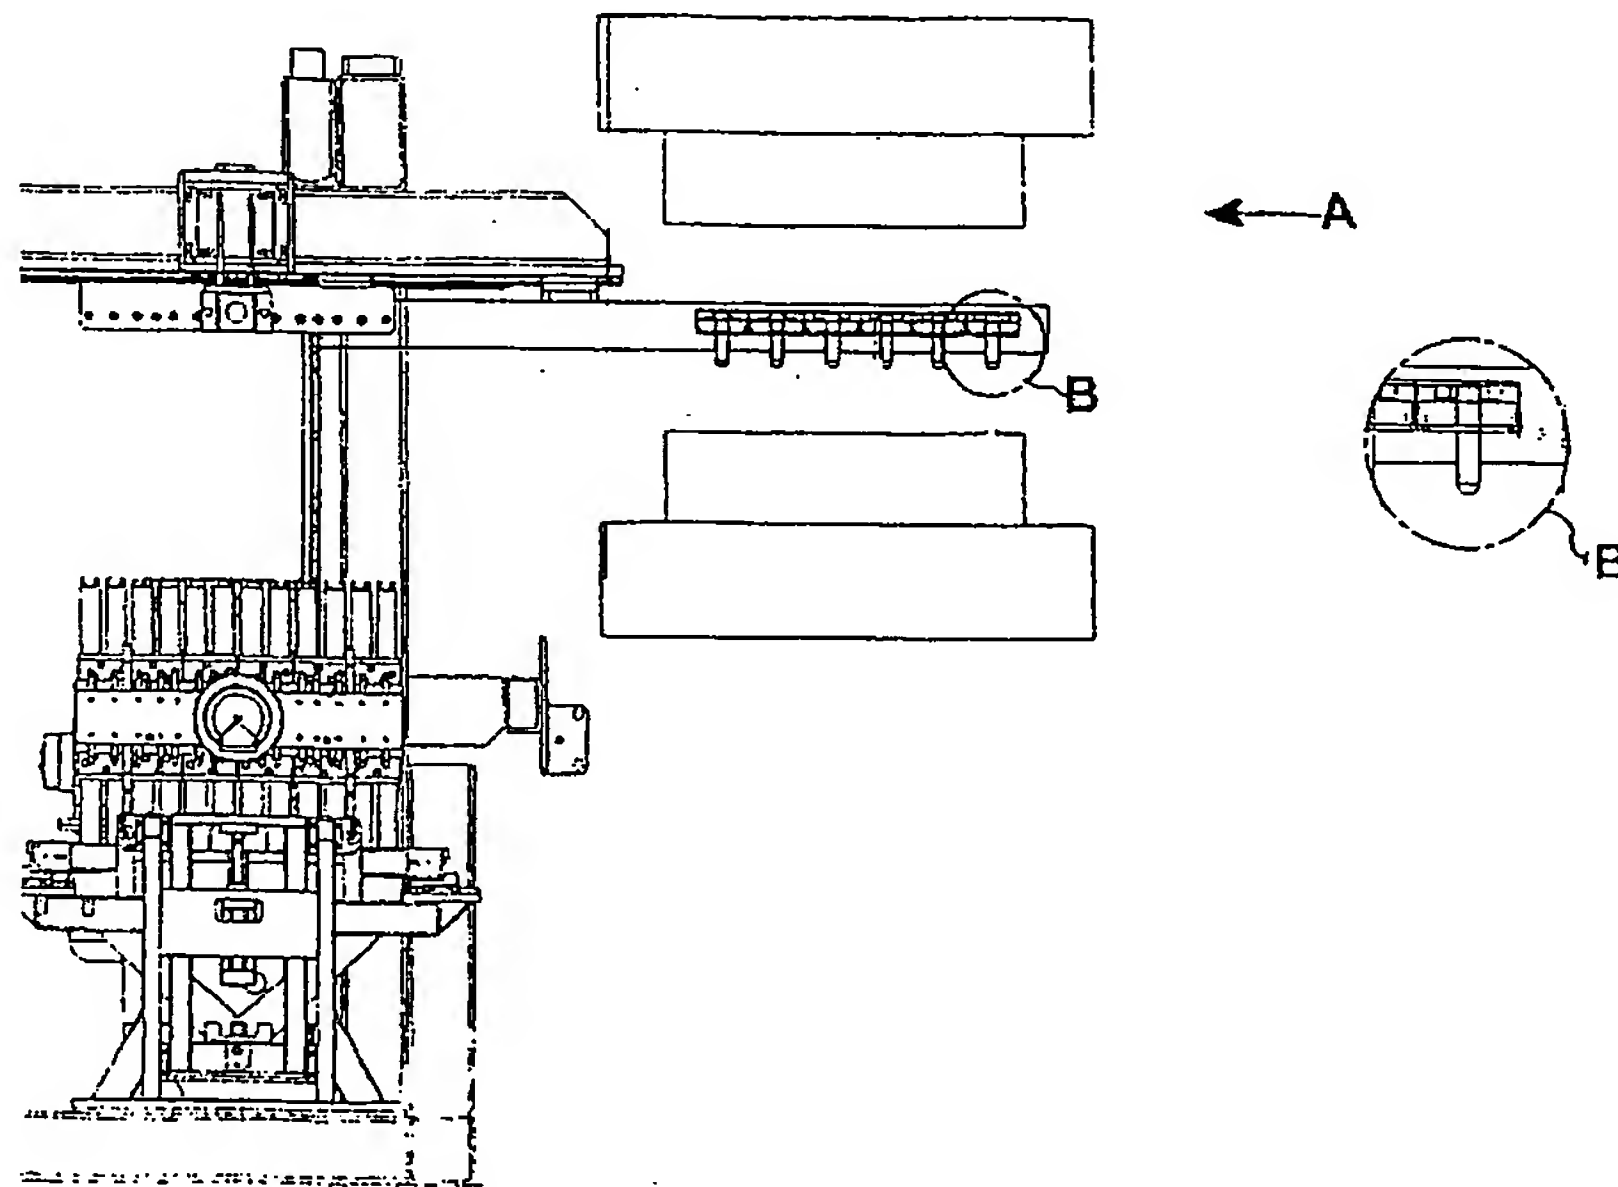

WO 2005/037522 A1

(57) Abstract: A device and process for conditioning plastic preforms (5) comprising a cooling turret (6) featuring faces fitted with many holders (7) for conditioning preforms (5). This turret rotates around a horizontal axis (X) and carries out a vertical traverse between a top position under an arm (3), which unloads the preforms from the mould, and a bottom position near the table for extracting the preforms (5) from the turret (6). The structure of the turret consists of two parallel bars (18, 19) and several joining plates (14) to which the bases of the holders (7) are attached.



SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *with international search report*